
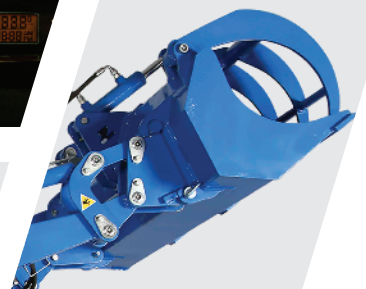


Solis

**THE TOUGHEST
PERFORMER
FOR YOUR FIELD**

Solis 26HP

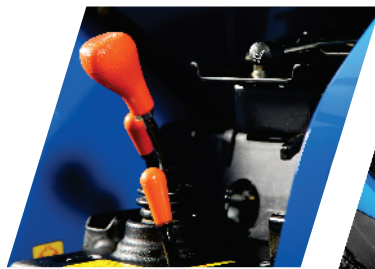

REINFORCED
SAFETY FEATURES

HIGH LIFTING
CAPACITY

POWER PACKED
ENGINE

REMASTERED
TRANSMISSION

ADVANCED
TECH EDGE

FRICION-LESS
AERODYNAMICS &
LED PROJECTION
LIGHT BONNET



3 YEARS
WARRANTY
(2000 HOURS)

COST
EFFICIENT
MECHANICAL TRACTORS

REINFORCED
STEEL
BUILT

STRATEGIC
COLLABORATION WITH
YANMAR

Solis

**THE TOUGHEST
PERFORMER
FOR YOUR FIELD**

Solis 26HP



FEATURES	SOLIS 26
Model Description	SOLIS-26
ENGINE	
Engine Type	Mitsubishi 3 Cylinder
HP Category	26
No. of Cylinders	3
Aspiration	Natural
Cubic Capacity (cc)	1318
Rated RPM (+/-25mm)	2700
Air cleaner	Dry
Cold Start	Yes
Max Torque (Nm)	75.2
Exhaust	Underhood Downdraft Silencer
TRANSMISSION	
Drive	4WD
Clutch	Single Clutch
Gearbox	6F+2R
Front Axle	4WD
Transmission	Sliding Mesh
SPEED (FORWARD)	
Maximum Speed (Km/Hr)	15.58 @ 2700
Minimum Speed (Km/Hr)	1.67 @ 2700
BRAKES	
Brakes	Oil Immersed
Type of actuation	Mechanical
Parking Brake	Latch Type with Brake Pedals
DIFFERENTIAL LOCK	
Differential lock	Yes, Foot Operated
PTO	
PTO (rpm)	540, 1000
PTO (actuation)	Mechanical
STEERING	
Steering	Power
ELECTRICAL	
Battery	12 V,50 Ah
Alternator	12V,40 Amp
Seven pin trailer socket	Yes
HYDRAULICS	
3 point linkage	Cat 1-N
Stay Bars	Check Chain
Hydraulic lifting capacity	600Kg
Auxiliary hydraulic circuit	1DA ISA Optional
Lift rods	Yes
Litre per minute(LPM)	14.85

FEATURES	SOLIS 26
SAFETY SWITCH	
Clutch Safety Switch	Yes
CAPACITY (LTRS)(+/-5%)	
Fuel tank (Lit)	26.5
TURNING RADIUS	
Without Brakes (m)	2.1 (RHS) 2.3 (LHS)
TYRE	
Front	6.00-12
Rear	8.30-20
DIMENSION & WEIGHT(+/-5%)	
Weight(kg)	1020
Wheel Base (mm)	1560
Total Length (mm)	2705
Total Width (mm)	925 -1197
Height (mm) Up to ROPS	2153
Min Ground Clearance (mm)	225
Front Track (mm)	894
Rear Track (mm)	725 -997
OTHERS	
Fuel Indicator gauge	Yes
Front Toe Hook	Yes
Front & rear weights with std. Ballast	Front weights-15x2
Trailer Hitch	1. Clevis Hitch 2. Swinging Drawbar (Optional)
ROPS	Yes
OPTIONAL FEATURES	
Tyres	TURF TYRES: Front Tyre - 23x8.50-12 Rear tyre - 33x15.50-16.5 INDUSTRIAL TYRES: Front tyre- 23x8.50-12 Rear tyre- 33x15.50-16.5

DEALER STAMP

NORTH EAST GARDEN MACHINERY
UNIT 16 PEARSONS IND. ESTATE
HETTON LE HOLE
TYNE AND WEAR
DH50BG www.negm.co.uk
01915269209
sales@negm.co.uk

INTERNATIONAL TRACTORS LIMITED

H.O: TERI University Campus, Plot No 10, Institutional Area, Vasant Kunj, New Delhi 110070, INDIA

Work: Jalandhar Road, Hoshiarpur - 146020, Punjab (India) | Phone: +91 1882 302220, 302221

Fax: +91 1882 302293 | Email: exports@sonalika.com | URL: www.sonalika.com